

## Mitsubishi Heavy Industries VRF systems to KNX Interface

The Mitsubishi Heavy Industries interface has been specially designed to allow bidirectional control and monitoring of Mitsubishi Heavy Industries VRF systems from a KNX installation.

Direct access to outdoor unit's communication bus,
Supports KNX standard datapoints (DPTs) that guarantees a seamless integration with any KNX device or system.

Wide range of monitoring & control datapoints available.

Configuration through IP or RS-232 port.

Front cover LED indicators to provide easy to check communication status on both the Ethernet and serial ports.


LED indicators to provide easy to check communication status and errors.





### Use Case

Integration of Mitsubishi Heavy Industries Air Conditioner Units through Superlink connection into a KNX installation.

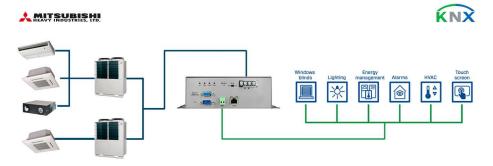

DIRECT CONNECTION TO VRF OUTDOOR UNITS

The gateway is directly connected to the outdoor units communication bus and enables the control of all the indoor units connected to the system. SET UP BY LINKBOX

The configuration is carried out using Linkbox software. This one allows you to define your own settings for the device and offers extra functions such as a diagnostic feature.

User Manual	General information about this product	Download
Installation Manual	Learn how to install the device in your project	Download
HVAC Compatibility tool	Find the appropriate solution for your HVAC integration	Open
HVAC Compatibility	Check your HVAC compatibility	Download
EC Declaration of Conformity	Check the product certification	Download

## Programming tools

LinkBox MB	Configuration software tool	Download

## Commercial Documentation

Marketing Datasheet	Discover all the integration solutions for Mitsubishi Heavy Industries	Download
Intesis Brochure	Know more about the Intesis current available products	Download

INKNXMHI0480000	Mitsubishi Heavy Industries VRF systems to KNX Interface - 48 units
INKNXMHI1280000	Mitsubishi Heavy Industries VRF systems to KNX Interface - 128 units

# INCLUDED COMPONENTS:

Intesis Gateway.
Installation Manual. RS-232 Configuration Cable. Power Supply Cable. Warranty: 36 months.